






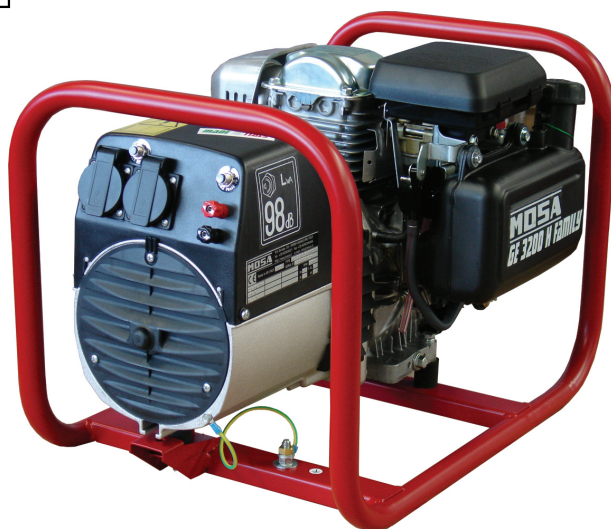



## GENERATING SET GE 3200 H FAMILY

- Honda, Gasoline engine
- Oil alarm shut off
- Single-phase synchronous alternator
- Overload protection
- Battery charger 12V - 10A
- Protective frame
- Silenced (S)
- Portable
- Meets EEC directives



### Standard equipment



									
Gasoline engine	Air cooling	Manual recoil	Engine shut down (oil)						
									
Synchronous alternator	Thermal shut off	Socket 230V Schuko	Battery charger						

### Options on request



- Plug 230V 16A 2PT (M) SCHUKO
- Earthing Kit MT 10

## Technical Data

## GE 3200 H FAMILY

**A.C. GENERATION** 50 Hz, synchronous, single-phase, self-excited, self-regulated, brushless

Single-phase generation (max)	2.8 kVA (2.4 kW) / 230 V / 12.2 A
Single-phase generation (continuous)	2.4 kW
Battery charger d.c.	12V - 10A
Duty cycle	100%
Power factor (Cos φ)	0.8
Insulation class	H

On request other voltages and frequencies (60 Hz)

**ENGINE** Gasoline, 4-stroke, air cooled

Type	GC 190
Output*	3.7 kW (5 HP)
Speed	3000 rpm
Displacement	187 cm <sup>3</sup>
Cylinders	1
Fuel consumption	313 g/kWh

\* Maximum output according to ISO 3046/1

### GENERAL SPECIFICATIONS

Tank capacity	2 l
Runnig time (Load 75%)	2.5 h
Protection	IP 23
Dimensions Lxwxh (mm)	555x370x290
Weight	35 kg
Noise level	98 LWA (73 dB(A) - 7 m)

Values shown are nominal values. For further information please contact the sales department.